


# PRODUCT DATASHEET

## LED Panel IP20

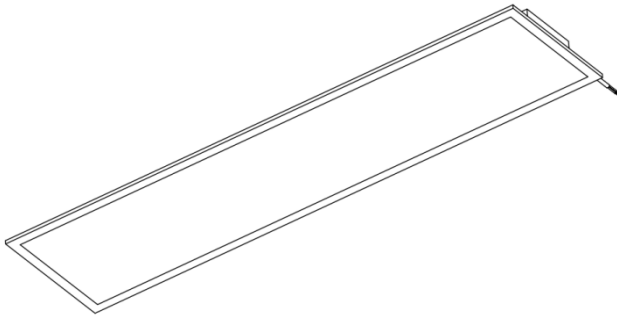

---

### Areas of application

- School
- Hospital
- Office

---

### Product benefits

- With uniform light distribution, high light transmittance and long service life
- The PS transparent lamp cover has IK02 level impact protection function.
- Sleek and lightweight slim body design, compact but powerful
- Long 30,000 hours lifetime reduces maintenance costs

---

### Product features

- High efficiency and energy saving
- Extra-long lifespan
- Excellent light quality
- Various specification
- Safe and Stable

## TECHNICAL DATA

### Electrical data


Nominal wattage	40W
Nominal voltage	176-264 V
Mains frequency	50/60 Hz
Protection class	IP20

### Photometrical data

Luminous flux	4800
Luminous efficacy	120
Color temperature	3000K/4000K/6500K
Color rendering index Ra	80
Beam angle	120 °
PF	0.9

### Dimensions & Weight

Length	1195mm
Width	295mm
Height	35mm
Product weight	1460g

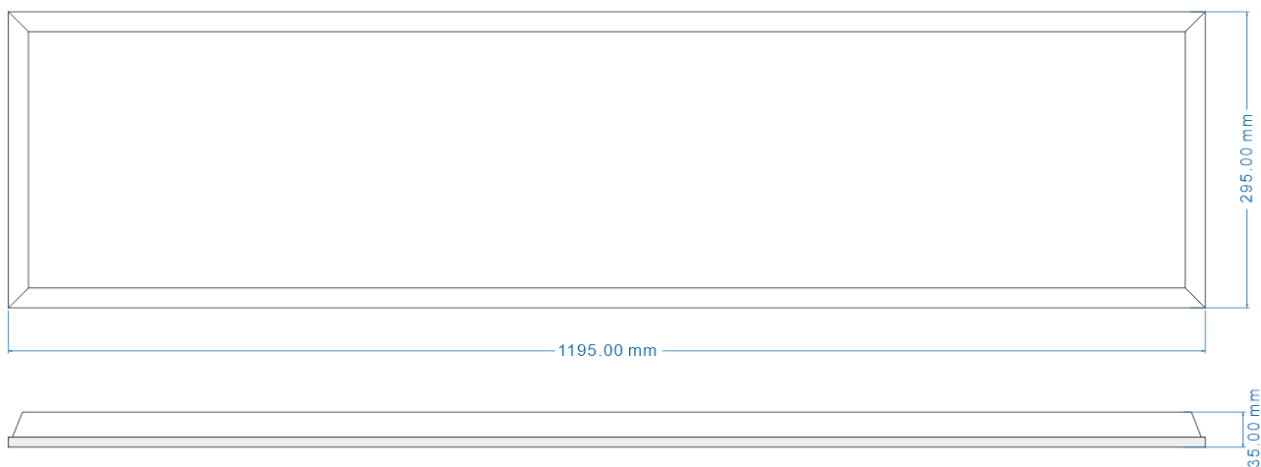

### Materials & Colors

Frame	Iron
Base	Iron
Diffuser	PS

### Application & Mounting

Type of protection	IP20
Dimmable	No
Mounting type	recessed

Product	EAN10	EN40	S-Unit
LD VAL PL 0312 40W 865 PF9 6X1 MVN OSRAM	4099854684807	4099854684814	6*1