


# Basic 2.0 mm Single-mode Patch Cord, LSZH™, CPR Dca Corning® SMF-28® Ultra, Single-mode, LC UPC Duplex to LC UPC Duplex, 1 m



**Part Number:**  
**F040402G2Z20001M**

Cable assemblies are a basic component for any network infrastructure projects you may have. The performance of our patch cords and pigtails comply with the optical and mechanical requirements of the industry. They are available in 1- and 2-fiber combinations. Corning's pre-terminated assemblies use only high-quality Corning optical fibers to ensure total performance quality.

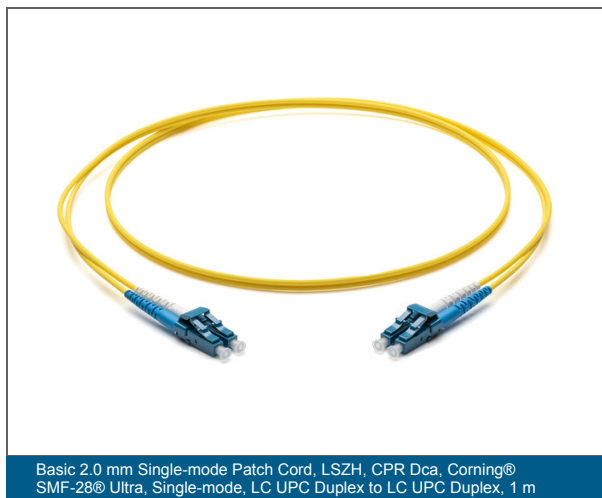

# Basic 2.0 mm Single-mode Patch Cord, LSZH™, CPR Dca Corning® SMF-28® Ultra, Single-mode, LC UPC Duplex to LC UPC Duplex, 1 m



## Specifications

General Specifications	
Flame Rating	LSZH/FRNC
Fiber Category	Single-mode (OS2)
Product Category	Patch Cord
Cable Assembly Type	Patch Cords
Environment	Indoor
Application	Fiber to the Premises, In-Building Network (IBN), Local Area Network (LAN), Central Office
Cable Type	Zipcord

Standards	
Fiber Standards	ITU-T G.657.A1, ITU-T G.652.D
Reaction to Fire	Dca
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Intermateability	IEC 61754

Environmental Conditions	
Temperature Range, Installation	-20 °C to 70 °C
Temperature Range, Operation	-20 °C to 70 °C
Temperature Range, Storage	-20 °C to 70 °C

Design	
Fiber Count	2
Outer Jacket Material	LSZH/FRNC
Outer Jacket Color	Yellow
Polarity	Crossed, TIA-568 Type-B
Fiber Type	Single-mode

# Basic 2.0 mm Single-mode Patch Cord, LSZH™, CPR Dca Corning® SMF-28® Ultra, Single-mode, LC UPC Duplex to LC UPC Duplex, 1 m



Design	
Color	Yellow
Fibers per Port	2

Mechanical Specifications	
Nominal Outer Diameter	2 mm
Max. Tensile Strength, Short-Term	300 N
Max. Tensile Strength, Long-Term	150 N
Crush Resistance	1000 N/10 cm
Min. Bend Radius Installation	20 mm
Min. Bend Radius Operation	10 mm

Optical Characteristics	
Fiber Code	Z
Performance Option Code	25
Fiber Category	OS2
Fiber Type	Single-mode (OS2) / 250 µm
Fiber Name	Bend-Improved Single-mode (OS2)
Maximum Attenuation	0.38 dB/km / 0.38 dB/km / 0.25 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Compliance	ITU-T G.652.D and ITU-T G.657.A1
Fiber Core Diameter	8.2 µm
Cladding diameter	125 µm
Coating diameter	242 µm
Dispersion @ 1550 nm	≤ 18 [ps/(nm*km)]
Dispersion @ 1625 nm	≤ 22 [ps/(nm*km)]
Cable cutoff wavelength	1260 nm
Mode-Field Diameter at 1310 nm	9.2 µm
Mode-Field Diameter at 1550 nm	10.4 µm

# Basic 2.0 mm Single-mode Patch Cord, LSZH™, CPR Dca Corning® SMF-28® Ultra, Single-mode, LC UPC Duplex to LC UPC Duplex, 1 m



Optical Characteristics	
PMD Link Design Value	≤ 0.04 ps/√km
PMD maximum individual fiber	≤ 0.1 ps/√km

Specifications - Connector A	
Polish	UPC
Insertion Loss, Max.	0.25 dB
Tensile Strength Jacketed Cable	50 N
Durability	≤ 0.2 dB change, 500 rematings, FOTP-21
Boot Color	Blue / White
Connector Type	LC UPC Duplex
Ferrule Material	Ceramic
Housing Color	Blue
Housing Material	Composite
Boot Type	Duplex
Reflectance	≤ -45 dB

Specifications - Connector B	
Polish	UPC
Insertion Loss, Max.	0.25 dB
Tensile Strength Jacketed Cable	50 N
Durability	≤ 0.2 dB change, 500 rematings, FOTP-21
Boot Color	Blue / White
Connector Type	LC UPC Duplex
Ferrule Material	Ceramic
Housing Color	Blue
Housing Material	Composite
Boot Type	Duplex
Reflectance	≤ -45 dB

# Basic 2.0 mm Single-mode Patch Cord, LSZH™, CPR Dca Corning® SMF-28® Ultra, Single-mode, LC UPC Duplex to LC UPC Duplex, 1 m



Dimensions	
Length	1 m
Outer Diameter	2 mm

Ordering Information	
Product Number	F040402G2Z20001M
Packaging Method	Box
Shipping Weight	22 g
Shipping Height	190 mm
Shipping Width	250 mm
Shipping Depth	380 mm
Units per Delivery	1/1



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany  
00 800 2676 4641 • FAX: • [www.corning.com/opcomm/emea](http://www.corning.com/opcomm/emea)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/emea/trademarks](http://www.corning.com/opcomm/emea/trademarks). Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2026 Corning Optical Communications. All rights reserved.