

Everon® Copper Datacom U/UTP 450/24, Category 6, PVC, Eca 4P, Green

CORNING

Part Number:
DE010024334

The Everon® Copper Datacom U/UTP 450/24 cable is designed up to 450MHz and its transmission characteristics exceed Category 6 specifications according to EN50288-6-1 IEC 61156-5. High system margins for the complete link according to the last version of ISO/IEC 11801 and EN 50173 (Series) will be achieved by using corresponding hardware together with this highend copper cable. The cable has a streamlined construction and low weight. Unshielded cable (U/UTP).

Features and Benefits

U/UTP 450/24 cable designed up to 450 MHz

Fulfils all requirements of category 6 EN50288-6-1 and IEC 61156-5

Suitable for Classe D to E according to ISO/IEC 11801. EN50173 and 10 Gigabit Ethernet according to IEEE 802.3an


Tested and approved for Power over Ethernet applications (PoE/PoE+/4PPoE) according to IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt up to 90W

PVC Indoor jacket

Unshielded cable (U/UTP)

Length marking on jacket

Eca

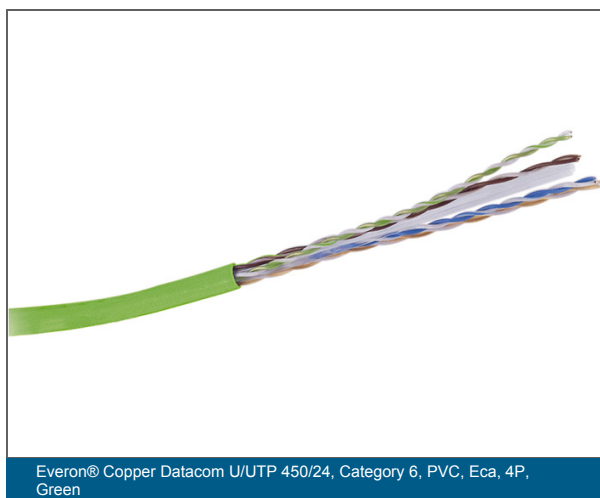

Everon® Copper Datacom U/UTP 450/24, Category 6, PVC, Eca 4P, Green

CORNING

Specifications

General Specifications	
Category	6
Cable type	U/UTP
Halogen-free	No
Construction	Simplex, 4P
Reaction to Fire	Eca
Legacy Part Number	VOL6UP4305
Brand	Everon®

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	IEC 61156-5, EN 50288-6-1, ISO/IEC 11801 Ed. 2.2, EN 50173-1, ANSI/TIA-568-C.2, IEC 60304
Design And Test Criteria	Compliant with PoE / PoE++ IEEE 802.3af, IEEE 802.3at, IEEE 802.3 an 1000 Base-T
Flame propagation test	Flame retardant according to IEC 60332-1-2 (single cable)

Environmental Conditions	
Temperature range, installation	0 °C to 50 °C
Temperature range, operation	-20 °C to 60 °C

Cable Design	
Conductor	Copper Wire, AWG 24/1
Conductor insulation	Solid PE
Twisting	2 cores to a pair
Outer jacket material	PVC
Outer jacket colour	Green

Everon® Copper Datacom U/UTP 450/24, Category 6, PVC, Eca 4P, Green

CORNING

Mechanical Characteristics

Fire load	374 MJ/km
Nominal outer diameter	5.4 mm
Min. bend radius installation	8x Cable-Ø
Maximum tensile strength	100 N

Electrical Characteristics

Conductor resistance unbalance	2 %
Delay skew	40 ns/100 m
Max. loop resistance	190 Ω/km
Propagation delay	520 ns/100 m
Voltage rating	Less than 75 V DC max and less than 50 V ACC max
Propagation velocity at >10 MHz (NVP*c)	67 %
Coupling attenuation	40 dB
Insulation Resistance	> 5000 MΩ*km

Ordering Information

Product Number	DE010024334
Cable length	305 m
Packaging method	Reelex Box
Units per delivery	1/1

Electrical Characteristics

Frequency [MHz]	4	10	20	63	100	250	300	450
Attenuation according to Standard [db/100m]	3.83	6.0	8.53	15.48	19.92	33.02		46.22
Typical attenuation [db/100m]	3.6	5.7	8.3	14.8	19.0	31.0	34.0	43.0

Everon® Copper Datacom U/UTP 450/24, Category 6, PVC, Eca 4P, Green



Electrical Characteristics								
NEXT according to Standard [db/100m]	66.27	60.3	55.78	48.36	45.3	39.33		35.5
Typical NEXT Values [db/100m]	71.0	65.0	61.0	53.0	50.0	44.0	43.0	40.0
ACR-N according to Standard [db/100m]	55.96	48.0	41.98	32.08	28.0	20.04		14.94
Typical ACR-N Values [db/100m]	67.5	59.3	52.7	38.2	31.0	13.0	9.0	



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany
 +00 800 2675 4641 • FAX: • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2026 Corning Optical Communications. All rights reserved.