

# Everon® Copper Datacom Class EA Patch Cord, 2xRJ45, Cat.6A, S/FTP LSZH AWG 26 blue, 1 m

CORNING

**Part Number:**  
**CCAAGB-G2002-A010-C0**

The application-neutral Everon® Copper Datacom category 6A patch cords have four individual foil-shielded pairs (PiMF) and an additional braid shield (S/FTP). They are assembled with a shielded RJ45 connectors on each end. The zero halogen patch cords (LSZH) are non-corrosive according to IEC 60754-2 (FRNC), low smoke according to IEC 61034 and flame retardant according to IEC 60332-1. Everon Copper Datacom CCAAGB patch cords provide additional latch protection. They are available in various lengths and colours.

## Features and Benefits

Application-neutral due to using all four pairs of RJ45 connectors

Minimum surface transfer impedance of cable (<10 mΩ/m at 10 MHz)


Outstanding transmission characteristics according to 10GBase-T

Additional latch protection

Category 6A

PVP Certificate

Supports Power over Ethernet (PoE / PoE+ / PoE++).  
IEEE 802.3bt-2018 performance (4PPoE)  
Ready for new applications powered on 4 pairs up to 90W

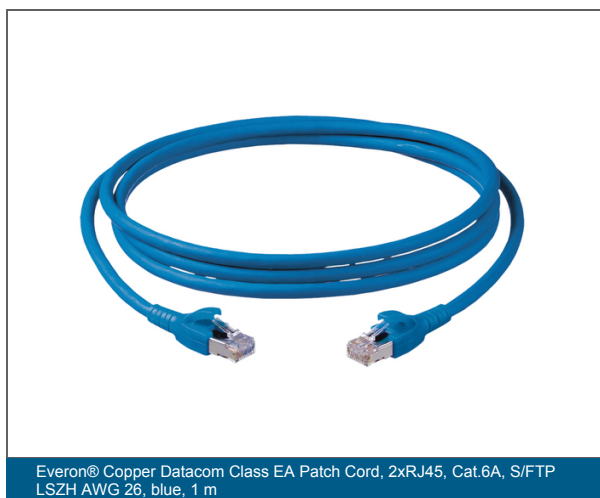

Everon® Copper Datacom Class EA Patch Cord, 2xRJ45, Cat.6A, S/FTP LSZH AWG 26, blue, 1 m

# Everon® Copper Datacom Class EA Patch Cord, 2xRJ45, Cat.6A, S/FTP LSZH AWG 26 blue, 1 m



## Specifications

General Specifications	
Area/range of application	1000Base-T; 2,5GBase-T; 5GBase-T; 10GBase-T/FDDI; ATM
Category	6A
Cable type	S/FTP
Halogen-free	Yes
Brand	Everon®
Third Party Certificate	Yes ( <a href="http://www.corning.com/emea/en/certificates">www.corning.com/emea/en/certificates</a> )

Standards	
Flame retardance	Flame retardant according to IEC 60332-1-2 (single cable)
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Design And Test Criteria	Compliant with PoE / PoE++ IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt
Halogen content test	Low Smoke to IEC 61034
Level of corrosion	Non-corrosive according to IEC 60754-2

Environmental Conditions	
Temperature range, installation	0 °C to 50 °C
Temperature range, operation	-20 °C to 60 °C
Transport and indoor storage	Dry environment, no direct sunlight, room temperature ≤ 40 °C

Cable Design	
Conductor insulation	Halogen-free foam-skin material
Twisting	2 cores to a pair
Pair screen	Al-laminated foil around each pair
Overall screen	Copper braid, tinned
Outer jacket material	LSZH/FRNC

# Everon® Copper Datacom Class EA Patch Cord, 2xRJ45, Cat.6A, S/FTP LSZH AWG 26 blue, 1 m

CORNING

## Cable Design

Outer jacket colour	Blue
Outer diameter	5.9 mm

## Mechanical Specifications

Fire load	0.43 MJ/m
Min. bend radius installation	47 mm

## Specifications - Connector A

Connector type	RJ45 - 8/8
Durability Cycles	750 N/A
Connector Material	Pin gold plated 50µ inch

## Specifications - Connector B

Connector type	RJ45 - 8/8
Durability Cycles	750 N/A
Connector Material	Pin gold plated 50µ inch

## Electrical Specifications

Mutual capacity	1600 pF/km
Max. loop resistance	290 Ω/km
DC resistance unbalance	4.3 %
Insulation resistance	5000 MΩ*km
Impedance Zo at 1-100 MHz	100 Ω ± 5% at 100 MHz

## Dimensions

Length	1 m
--------	-----

# Everon® Copper Datacom Class EA Patch Cord, 2xRJ45, Cat.6A, S/FTP LSZH AWG 26 blue, 1 m



## Dimensions

Weight	0.07 kg
--------	---------

## Ordering Information

Product Number	CCAAGB-G2002-A010-C0
Packaging method	Corn Starch Bag
Shipping weight	0.07 kg
Units per delivery	1/1



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany  
00 800 2676 4641 • FAX: • [www.corning.com/opcomm/emea](http://www.corning.com/opcomm/emea)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/emea/trademarks](http://www.corning.com/opcomm/emea/trademarks). Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2026 Corning Optical Communications. All rights reserved.