

Everon® Copper Datacom Class E Patch Cord, 2xRJ45, Cat.6, U/UTP PVC AWG 24 blue, 3 m



Part Number:
CCAVME-D2002-A030-C0

The application-neutral Everon® Copper Datacom category 6 patch cords is unshielded (U/UTP). They are assembled with unshielded RJ45 connectors on each end. The PVC patch cords are flame retardant according to IEC 60332-1. Everon Copper Datacom CCAVME patch cords provide additional latch protection. They are available in various lengths and colours.

Features and Benefits

Application-neutral due to using all four pairs of RJ45 connectors


IP68 rated ruggedized design

Additional latch protection

Category 6

Certified by a vendor-independent and impartial test lab (GHMT AG)

Supports Power over Ethernet (PoE / PoE+ / PoE++).
IEEE 802.3bt-2018 performance (4PPoE)
Ready for new applications powered on 4 pairs up to 90W

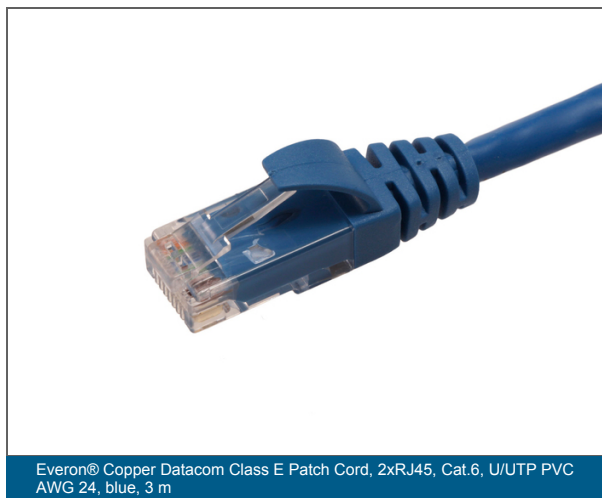

Everon® Copper Datacom Class E Patch Cord, 2xRJ45, Cat.6, U/UTP PVC AWG 24 blue, 3 m



Specifications

General Specifications

Area/range of application	10Base-T; 100Base-TX; 1000Base-T/ATMLAN1.2Gbit/s
Category	6
Cable type	U/UTP
Halogen-free	No
Legacy Part Number	VOL-6UP
Brand	Everon®
Third Party Certificate	Yes (www.corning.com/emea/en/certificates)

Standards

Flame retardance	Flame retardant according to IEC 60332-1-2 (single cable)
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Design And Test Criteria	Compliant with PoE / PoE++ IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt
Halogen content test	Low Smoke to IEC 61034
Level of corrosion	Non-corrosive according to IEC 60754-2

Environmental Conditions

Temperature range, installation	0 °C to 50 °C
Temperature range, operation	-20 °C to 60 °C
Transport and indoor storage	Dry environment, no direct sunlight, room temperature ≤ 40 °C

Cable Design

Twisting	2 cores to a pair
Outer jacket material	Polyvinyl Chloride (PVC)
Outer jacket colour	Blue

Everon® Copper Datacom Class E Patch Cord, 2xRJ45, Cat.6, U/UTP PVC AWG 24 blue, 3 m



Mechanical Specifications	
Fire load	0.35 MJ/m
Min. bend radius installation	43 mm

Specifications - Connector A	
Connector type	RJ45 - 8/8
Durability Cycles	750 N/A
Connector Material	Pin gold plated 50µ inch

Specifications - Connector B	
Connector type	RJ45 - 8/8
Durability Cycles	750 N/A
Connector Material	Pin gold plated 50µ inch

Electrical Specifications	
Mutual capacity	1600 pF/km
Max. loop resistance	94.2 Ω/km
DC resistance unbalance	5 %
Insulation resistance	500 MΩ*km
Impedance Zo at 1-100 MHz	100 Ω ± 5% at 100 MHz
Surface transfer impedance	100 N/A

Dimensions	
Length	3 m
Weight	11 kg

Everon® Copper Datacom Class E Patch Cord, 2xRJ45, Cat.6, U/UTP PVC AWG 24 blue, 3 m



Ordering Information	
Product Number	CCAVME-D2002-A030-C0
Packaging method	Corn Starch Bag
Shipping weight	0.12 kg
Units per delivery	1/1



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany
+00 800 2675 4641 • FAX: • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2026 Corning Optical Communications. All rights reserved.